


Chain WOX Stainless Pewag - Short Link

Product information

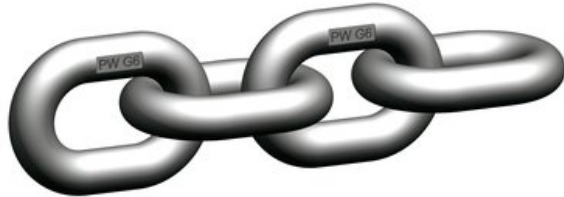

Stainless steel lifting chain, electrically welded and stamped, guaranteed compatible with Connex CWI connectors.

Standard: Similar DIN 5687-1

The WOX chain is particularly suited for use in water and wastewater applications. It can also be used in connection with chemicals and food products; however, restrictions will apply.

Material: 1.4404 (AISI 316L).

Marking: According to standard

Finish: Brightly polished.

Standard: EN 818-2

Safety factor: 4:1

Grade: 6

| Part Code | Chain diameter mm | WLL ton | Min. Breaking force, kN | Model | b1 min. | b2 max. | dn mm | t mm | Weight kg/m | Delivery time |
|-----------------|----------------------|------------|----------------------------|-----------|---------|---------|----------|---------|----------------|---------------|
| 202100400000010 | 4 | 0.4 | 16 | WOX 4-6 | 5.8 | 14.8 | 4 | 12 | 0.4 | 10 |
| 202100500000010 | 5 | 0.63 | 25 | WOX 5-6 | 7.5 | 18.5 | 5 | 15.1 | 0.61 | 5 |
| 202100600000010 | 6 | 0.9 | 37.5 | WOX 6-6 | 8 | 21.5 | 6 | 18 | 0.88 | 5 |
| 202100700000010 | 7 | 1.25 | 50 | WOX 7-6 | 9.5 | 25.2 | 7 | 21 | 1.19 | 5 |
| 202100800000010 | 8 | 1.6 | 63 | WOX 8-6 | 10.8 | 28.6 | 8 | 24 | 1.53 | 5 |
| 202101000000010 | 10 | 2.5 | 100 | WOX 10-6 | 13.5 | 36 | 10 | 30 | 2.4 | 5 |
| 202101300000010 | 13 | 4.25 | 170 | WOX 13-6 | 17.5 | 46.8 | 13 | 39 | 4.05 | 10 |
| 202101600000010 | 16 | 6.3 | 250 | WOX 16-6 | 21.5 | 57.6 | 16 | 48 | 6 | 5 |
| 202102000000010 | 20 | 8 | 314 | WOX 20-5 | 27 | 72 | 20 | 60 | 9.29 | 10 |
| 202102600000010 | 26 | 12 | 471 | WOX 26-4+ | 35 | 93.6 | 26 | 78 | 16.2 | 10 |

Blueprint

