


1 in = 25.4 mm


Reference	Diameter	SF 5:1 WLL (t)	SF 4:1 WLL (t)	L Maxi (mm)	Torque (Nm)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight	
															(kg)	(lbs)
SS.FE.DSR M 8	M 8 (x1,25)	0,30	0,30	43	6	20	43	40	45	53	38	17	76	13	0,9	1,98
SS.FE.DSR M 10	M 10 (x1,50)	0,50	0,50	43	10	20	43	40	45	53	38	17	76	13	0,9	1,98
SS.FE.DSR M 12	M 12 (x1,75)	0,80	0,80	43	15	20	43	40	45	53	38	17	76	13	0,9	1,98
SS.FE.DSR M 14	M 14 (x2)	1,00	1,00	43	30	20	43	40	45	53	38	17	76	13	0,9	1,98
SS.FE.DSR M 16	M 16 (x2)	1,40	1,50	43	50	20	43	40	45	53	38	17	76	13	0,9	1,98
SS.FE.DSR M 18	M 18 (x2,5)	1,40	1,50	62	70	24	62	55	58	83	56	25	115	19	2,6	5,73
SS.FE.DSR M 20	M 20 (x2,5)	1,40	1,60	62	100	24	62	55	58	83	56	25	115	19	2,6	5,73
SS.FE.DSR M 22	M 22 (x2,5)	2,20	2,20	62	120	24	62	55	58	83	56	25	115	19	2,6	5,73

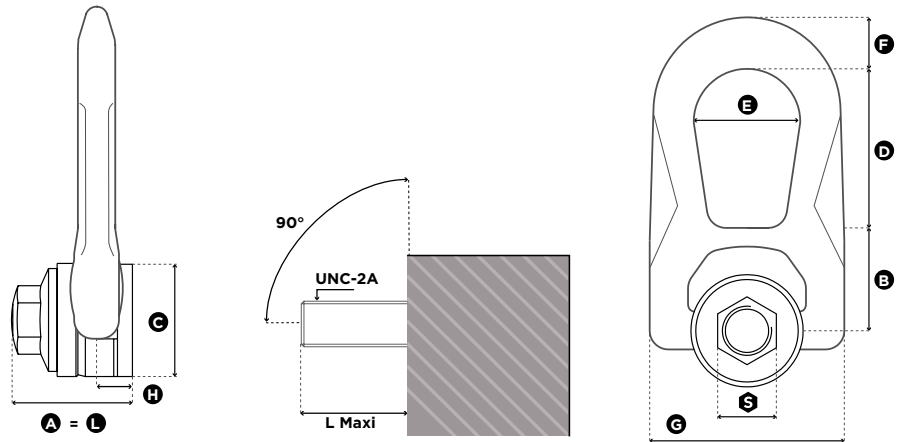

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	L Maxi (mm)	Torque (ft-lb)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight	
															(kg)	(lbs)
SS.FE.DSR U 516	UNC 5/16"-18	600	650	43	5	20	43	40	45	53	38	17	76	13	0,9	1.98
SS.FE.DSR U 038	UNC 3/8"-16	1,000	1,000	43	8	20	43	40	45	53	38	17	76	13	0,9	1.98
SS.FE.DSR U 050	UNC 1/2"-13	1,800	1,800	43	12	20	43	40	45	53	38	17	76	13	0,9	1.98
SS.FE.DSR U 058	UNC 5/8"-11	2,500	3,000	43	40	20	43	40	45	53	38	17	76	13	0,9	1.98
SS.FE.DSR U 075	UNC 3/4"-10	3,600	3,800	62	80	24	62	55	58	83	56	25	115	19	2,6	5.73
SS.FE.DSR U 078	UNC 7/8"-9	5,000	5,100	62	90	24	62	55	58	83	56	25	115	19	2,6	5.73

## STAINLESS STEEL FEMALE DOUBLE SWIVEL RING

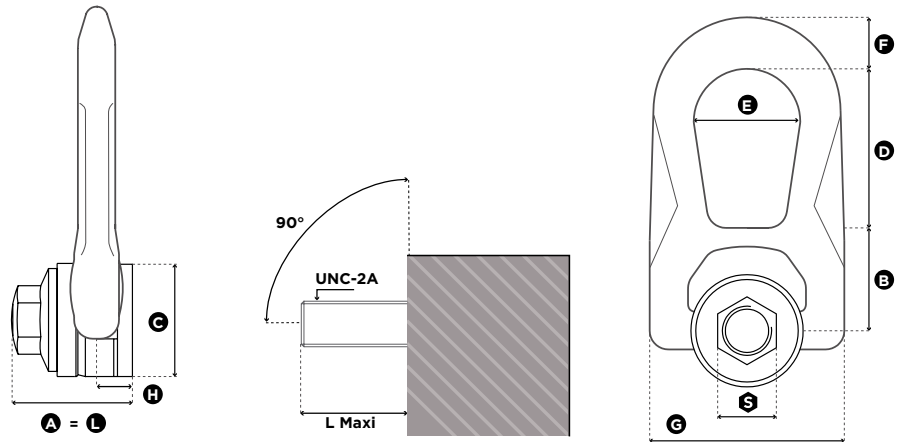

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	L Maxi (inch)	Torque (ft-lb)	S (inch)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	G (inch)	H (inch)	Weight	
															(kg)	(lbs)
SS.FE.DSR U 516	UNC 5/16"-18	600	650	1.69	5	0.79	1.69	1.57	1.77	2.09	1.50	0.67	2.99	0.51	0,9	1.98
SS.FE.DSR U 038	UNC 3/8"-16	1,000	1,000	1.69	8	0.79	1.69	1.57	1.77	2.09	1.50	0.67	2.99	0.51	0,9	1.98
SS.FE.DSR U 050	UNC 1/2"-13	1,800	1,800	1.69	12	0.79	1.69	1.57	1.77	2.09	1.50	0.67	2.99	0.51	0,9	1.98
SS.FE.DSR U 058	UNC 5/8"-11	2,500	3,000	1.69	40	0.79	1.69	1.57	1.77	2.09	1.50	0.67	2.99	0.51	0,9	1.98
SS.FE.DSR U 075	UNC 3/4"-10	3,600	3,800	2.44	80	0.94	2.44	2.17	2.28	3.27	2.20	0.98	4.53	0.75	2,6	5.73
SS.FE.DSR U 078	UNC 7/8"-9	5,000	5,100	2.44	90	0.94	2.44	2.17	2.28	3.27	2.20	0.98	4.53	0.75	2,6	5.73