

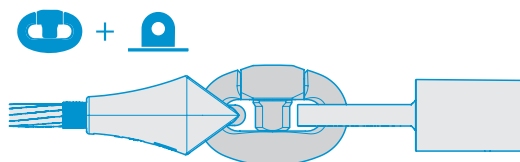
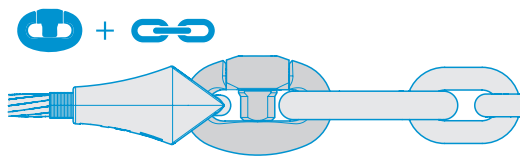


Käyttö

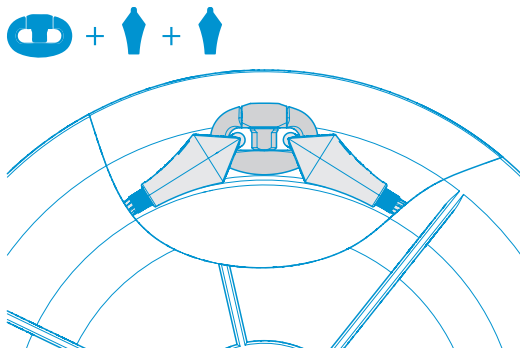


koko	SWL [kg]	Vähimmäis-murtokuorma [kg]
4	3,000	25,000
5	4,500	33,000
6	5,000	37,500
7	7,000	49,000
8	8,000	54,000
9	9,500	60,000
10	12,000	75,000
11	15,000	95,000
12	17,000	110,000
13	21,000	135,000
14	26,000	160,000
15	30,000	175,000
17	42,500	260,000

Hylkäysperusteet

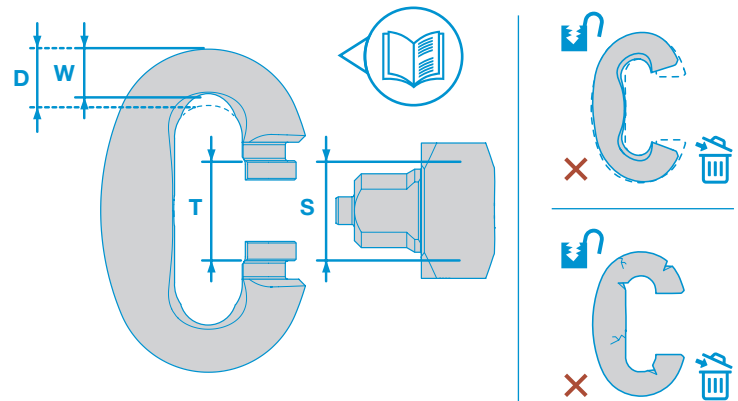

Huolto

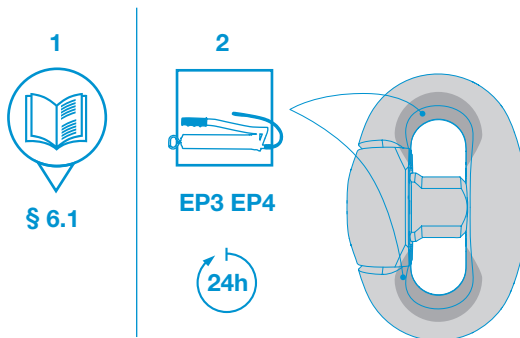

koko	S-T [mm]	W [%]	syklit
4	> 0.6	> 85% D	> 250,000
5	> 0.6	> 85% D	> 250,000
6	> 0.8	> 85% D	> 250,000
7	> 0.8	> 85% D	> 250,000
8	> 0.8	> 85% D	> 250,000
9	> 0.8	> 85% D	> 250,000
10	> 1.0	> 85% D	> 250,000
11	> 1.0	> 85% D	> 250,000
12	> 1.0	> 85% D	> 250,000
13	> 1.0	> 85% D	> 250,000
14	> 1.0	> 85% D	> 250,000
15	> 1.25	> 85% D	> 250,000
17	> 1.25	> 85% D	> 250,000